


E-Z mount incandescent canopy lighting fixtures


E-Z MOUNT CANOPY LIGHTING FIXTURES FOR COMMERCIAL COOKING HOODS

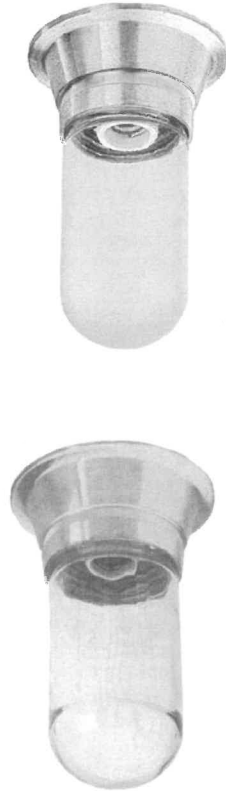

SPECIFICATIONS

- FIXTURE BODY:** Die cast aluminum with brushed finish
SOCKET: Porcelain body with copper shell
WIRE LEADS: 16 AWG, 6"(150mm) long
GROUND LEAD: 6"(150mm) long green colored 18 AWG wire
WATTAGE: Accepts standard 100 watt A19 bulb (not furnished).
VOLTAGE: Rated up to 120 volts
GASKETS: Silicone
GLOBE: Silicone* or clear, thermal and shock resistant tempered glass
- OVERALL SIZE:** 5-1/2"(140mm) diameter
8-3/4"(220mm) long with wire guard
- JUNCTION BOX:** Not furnished. Fixture is designed to accept any standard 1/2"(90mm) or 4"(100mm) junction box

- E-Z MOUNT FEATURE ALLOWS FOR QUICK INSTALLATION
- GASKETS PERMANENTLY AFFIXED SAVE INSTALLATION TIME
- U.L. LISTED AND C.S.A. CERTIFIED FOR USE IN COMMERCIAL COOKING HOODS
- MEETS ALL REQUIREMENTS FOR N.F.P.A. AND N.E.C. 410
- DESIGNED FOR CONVENIENT INSTALLATION TO PREWIRED HOODS
- GREASEPROOF, WATERPROOF AND HEATPROOF CONSTRUCTION
- ALUMINUM FIXTURES ARE FURNISHED WITH A BRUSHED FINISH TO MATCH STAINLESS STEEL HOOD INTERIORS

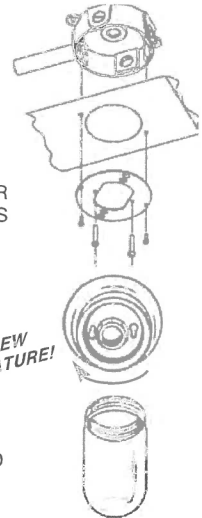

NOTE: **SILICONE COATED GLOBES PROVIDED WITH "TUFF-SKIN" COATING WHICH ELIMINATES HOT SPOT BROWNING / DISCOLORATION OF GLOBE. PREVENTS GLASS SHATTER FROM IMPACT, DROPPING, UNUSUAL STRESSES AND THERMAL SHOCK. SCRATCH RESISTANT...U.S.D.A. APPROVED... IMPROVES LIGHT SOURCE BY PROVIDING BETTER DIFFUSION.

UNDERWRITERS LABORATORIES STANDARD #1571 REQUIRES THAT FIXTURES IN COMMERCIAL COOKING HOODS MUST BE MOUNTED A MINIMUM OF 4 FEET (1200mm) ABOVE THE COOKING SURFACE.