

Gas Requirements:

Refer to Gas Burner Drawing for air, & access requirements

Clearance to combustibles:

Allow 1" clearance all the way around side walls;

14" above completed dome assembly;

30" Side clearance from door opening;

Allow 36" from front of oven landing to combustibles;

Non combustible concrete hearth.

Specifications:

Wood, liquid gas or propane fuel;


Check local codes for venting requirements.

Product UL listed for UL103HT direct vent,

Grease Duct or Type 1 Hood;

Crate ships 78"W x 82"D x 80"H, Oven weight: 3200 lbs..

5

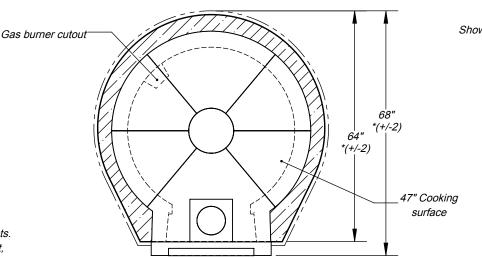

Shown with non combustible metal hearth

Intertek



Modena2G 120G

Gas Fired Pizza Oven


Architect Drawings SKU: FM2G120-GKD/GFA

Revision 6/16/2016


Sheet: 1 of 3

For more information: www.fornobravo.com

2

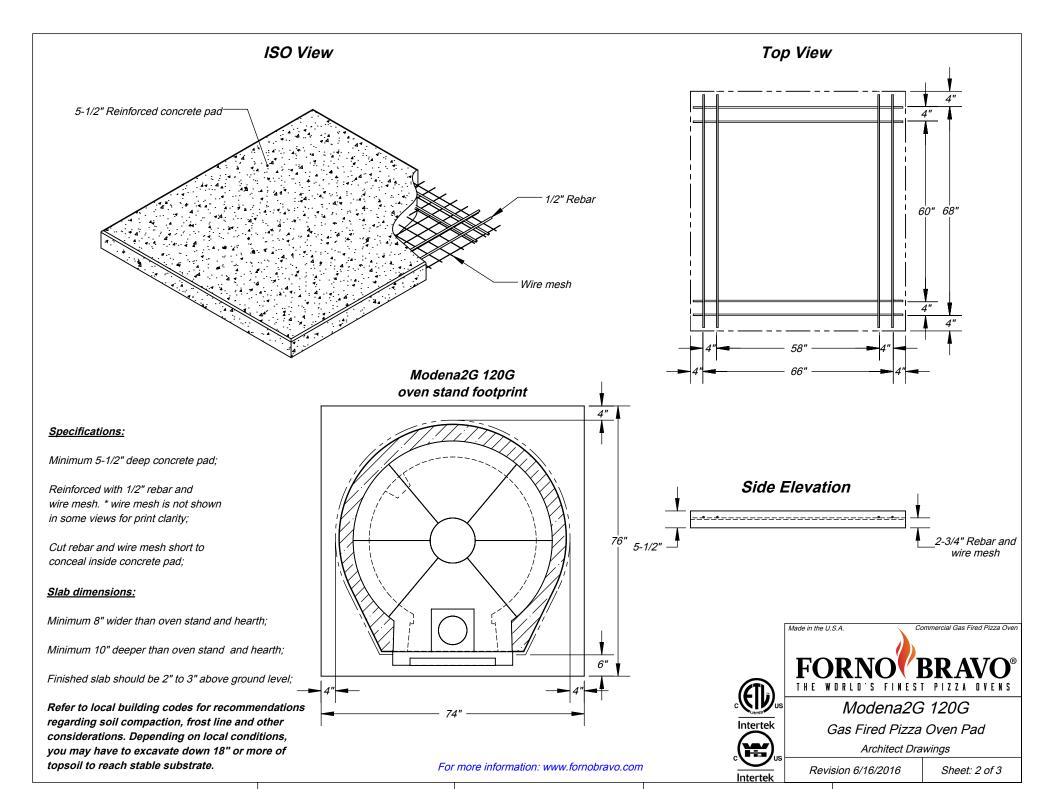


4 3 2

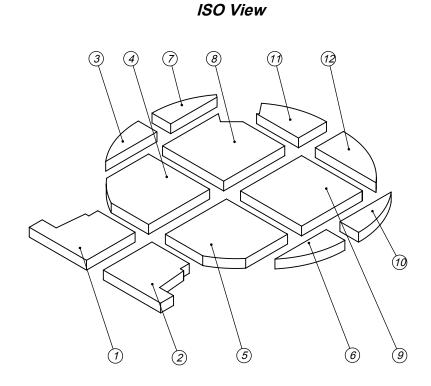

When ordering replacement tiles reference tile number and pizza oven model.

Top View Ø 48" Interior Ø47" Floor dome dimension Cutout for gas burner Pizza oven floor designed to allow approximately 1/2" gap between cooking surface and interior dome for thermal expansion and contraction during operation. Do not fill inside wall with mortar or similar bonding agent. If preferred the space can be filled with sand. Gaps between the wall and front landing can be filled with mortar or equivalent 1/2" bonding agent. - 25-1/4" Landing → 26-1/4" Interior wall dimension

Side Elevation



Specifications:

Pizza oven floor is NSF-4 rated with 2-1/2" thick surface.

Use 1/4" mortar, sairset, or #60 mesh sand to level the pizza oven floor.

No more than 3/8" filler around landing or door may not fit.

1/4" mortar, sairset, or #60 mesh sand to level pizza oven floor.



Modena2G 120G Pizza Oven Floor Tile Layout

Architect Drawings

SKU: FM120-GKD/GFA

Commercial Gas Fired Pizza Oven

Revision 6/16/2016

Made in the U.S.A.

Sheet: 3 of 3

For more information: www.fornobravo.com

4 3 2