

Top View

Clearance to combustibles:

Allow 1" clearance all the way around side walls;

14" clearance above completed dome assembly;

30" Side clearance from door opening;

36" clearance from front landing;

Non combustible metal hearth;


Specifications:

Wood fuel can be upgraded to gas unit. Refer to gas model for specifications;

Check local codes for venting requirements. Product UL listed for UL103HT direct vent, Grease Duct or Type 1 Hood;

Crate ships 78"W x 82"D x 80"H, Oven weight: 3100 lbs..

5

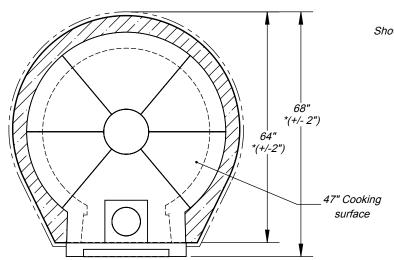

Shown with non combustible metal hearth

Intertek



Modena2G 120W Wood Fired Pizza Oven


Architect Drawings SKU: FM2G120-WKD/WFA

Revision 6/16/2016


Sheet: 1 of 3

For more information: www.fornobravo.com

4 3 2

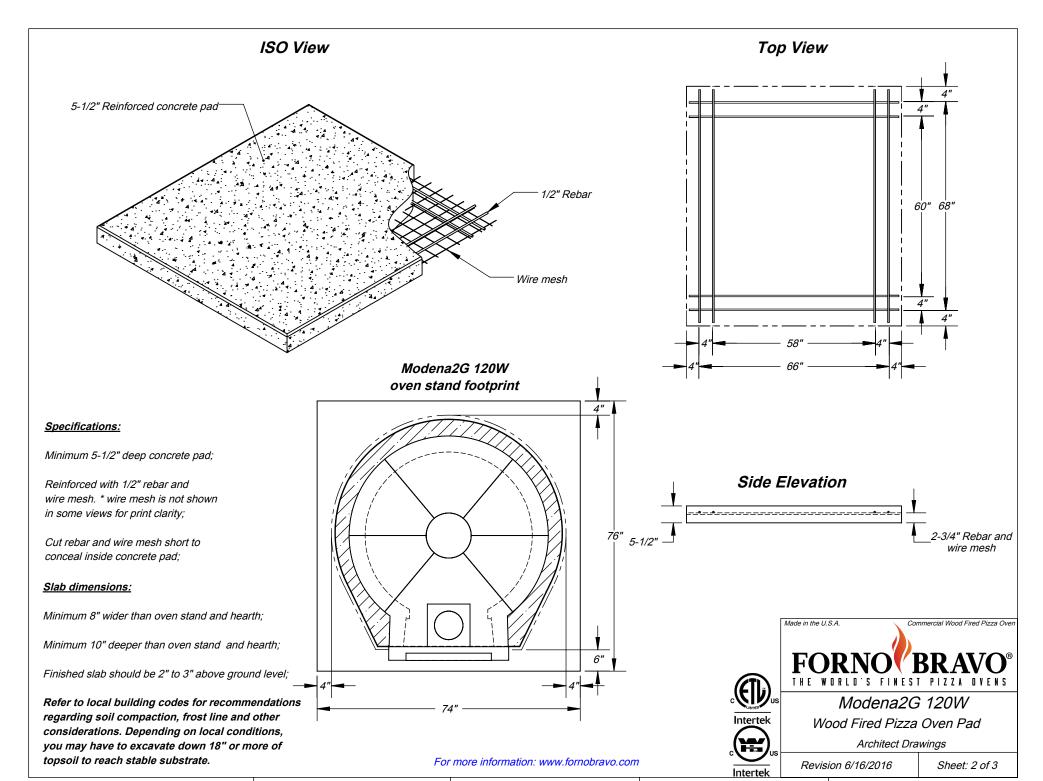


4 3 2

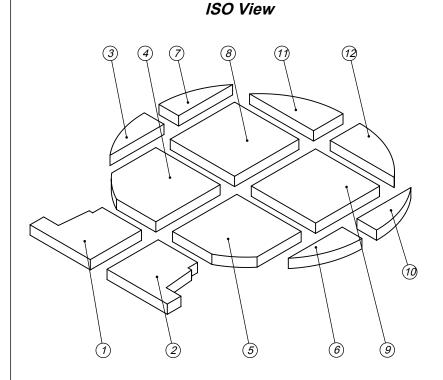

When ordering replacement tiles reference tile number and pizza oven model.

Top View Ø47" Ø 48" Interior dome dimension Floor Pizza oven floor designed to allow approximately 1/2" gap between cooking surface and interior dome for thermal expansion and contraction during operation. Do not fill inside wall with mortar or similar bonding agent. If preferred the space can be filled with sand. Gaps between the wall and front landing can be filled with mortar or equivalent bonding agent. 25-1/4" Landing -26-1/4" Interior wall dimensions

Side Elevation

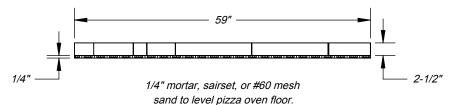

Specifications:

Pizza oven floor is NSF-4 rated with 2-1/2" thick surface.

Use 3/8" mortar, sairset or #60 mesh sand to level the pizza oven floor.

No more than 3/8" filler around landing or door may not fit.



Commercial Wood Fired Pizza Over Modena2G 120W

Pizza Oven Floor Tile Layout

Architect Drawings SKU: FM2G120-WKD/WFA

Revision 6/16/2016

Made in the U.S.A.

Sheet: 3 of 3

For more information: www.fornobravo.com