

5 2

For more information: www.fornobravo.com

Architect Drawings

Revision 03/31/2016

SKU: FPRO110-WKD/WFA

Sheet: 1 of 3

5-1/2" Reinforced concrete pad-1/2" Rebar Wire mesh

ISO VIEW

Professionale 110W Specifications:

Minimum 5-1/2" deep concrete pad;

Reinforced with 1/2" rebar and wire mesh. * wire mesh is not shown in some views for print clearity;

Cut rebar and wire mesh short to conceal inside concrete pad;


Slab dimensions:

Minimum 8" wider than oven stand and hearth:

Minimum 10" deeper than ovenstand and hearth;

Finished slab should be 2" to 3" above ground level;

Refer to local building codes for recommendations regarding soil compaction, frost line and other considerations. Depending on local conditions, you may have to excavate down 18" or more of topsoilto reach stable substrate.

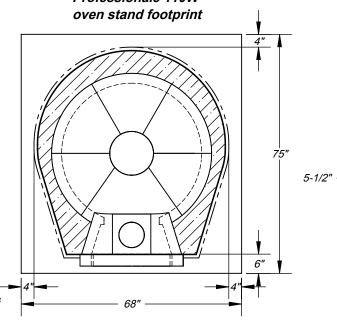

59" 67'

Top View



2-3/4" Rebar and wire mesh

Made in the U.S.A.



Architect Drawings


Revision 03/31/2016 Sheet: 2 of 3

Commercial Wood Fired Pizza Over

For more information: www.fornobravo.com

Intertek


ISO View

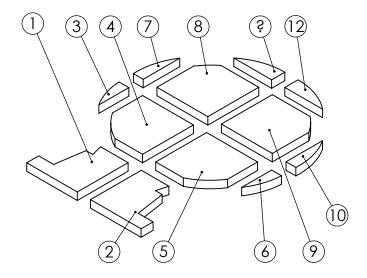

approximately 1/2" gap between cooking surface and interior dome for thermal expansion and contraction during operation.

Do not fill inside wall with mortar or similar bonding agent. If preferred the space can be filled with sand.


Gaps between the wall and from landing can be filled With mortar or equivalent bonding agent.

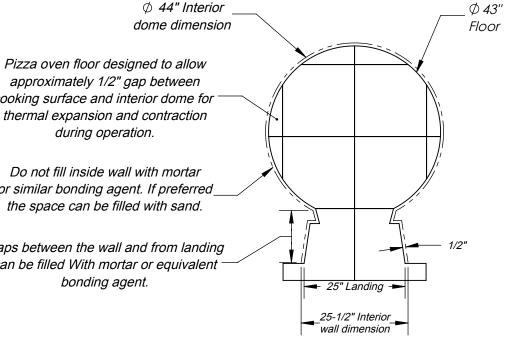

Top View

When ordering replacement tiles reference tile number and pizza oven model.

Side Elevation



1/4" mortar, sairset, or #60 mesh sand to level pizza oven floor.

Specifications:

Pizza oven floor is NSF-4 rated with 2-1/2" thick surface.

Use 1/4" mortar, sairset, or #60 mesh sand to level the pizza oven floor.

No more than 3/8" filler around landing or door may not fit.

5



Pizza Oven Floor Tile Layout

SKU: FPRO110-WKD/WFA

Revision 03/31/2016

Sheet: 3 of 3

For more information: www.fornobravo.com